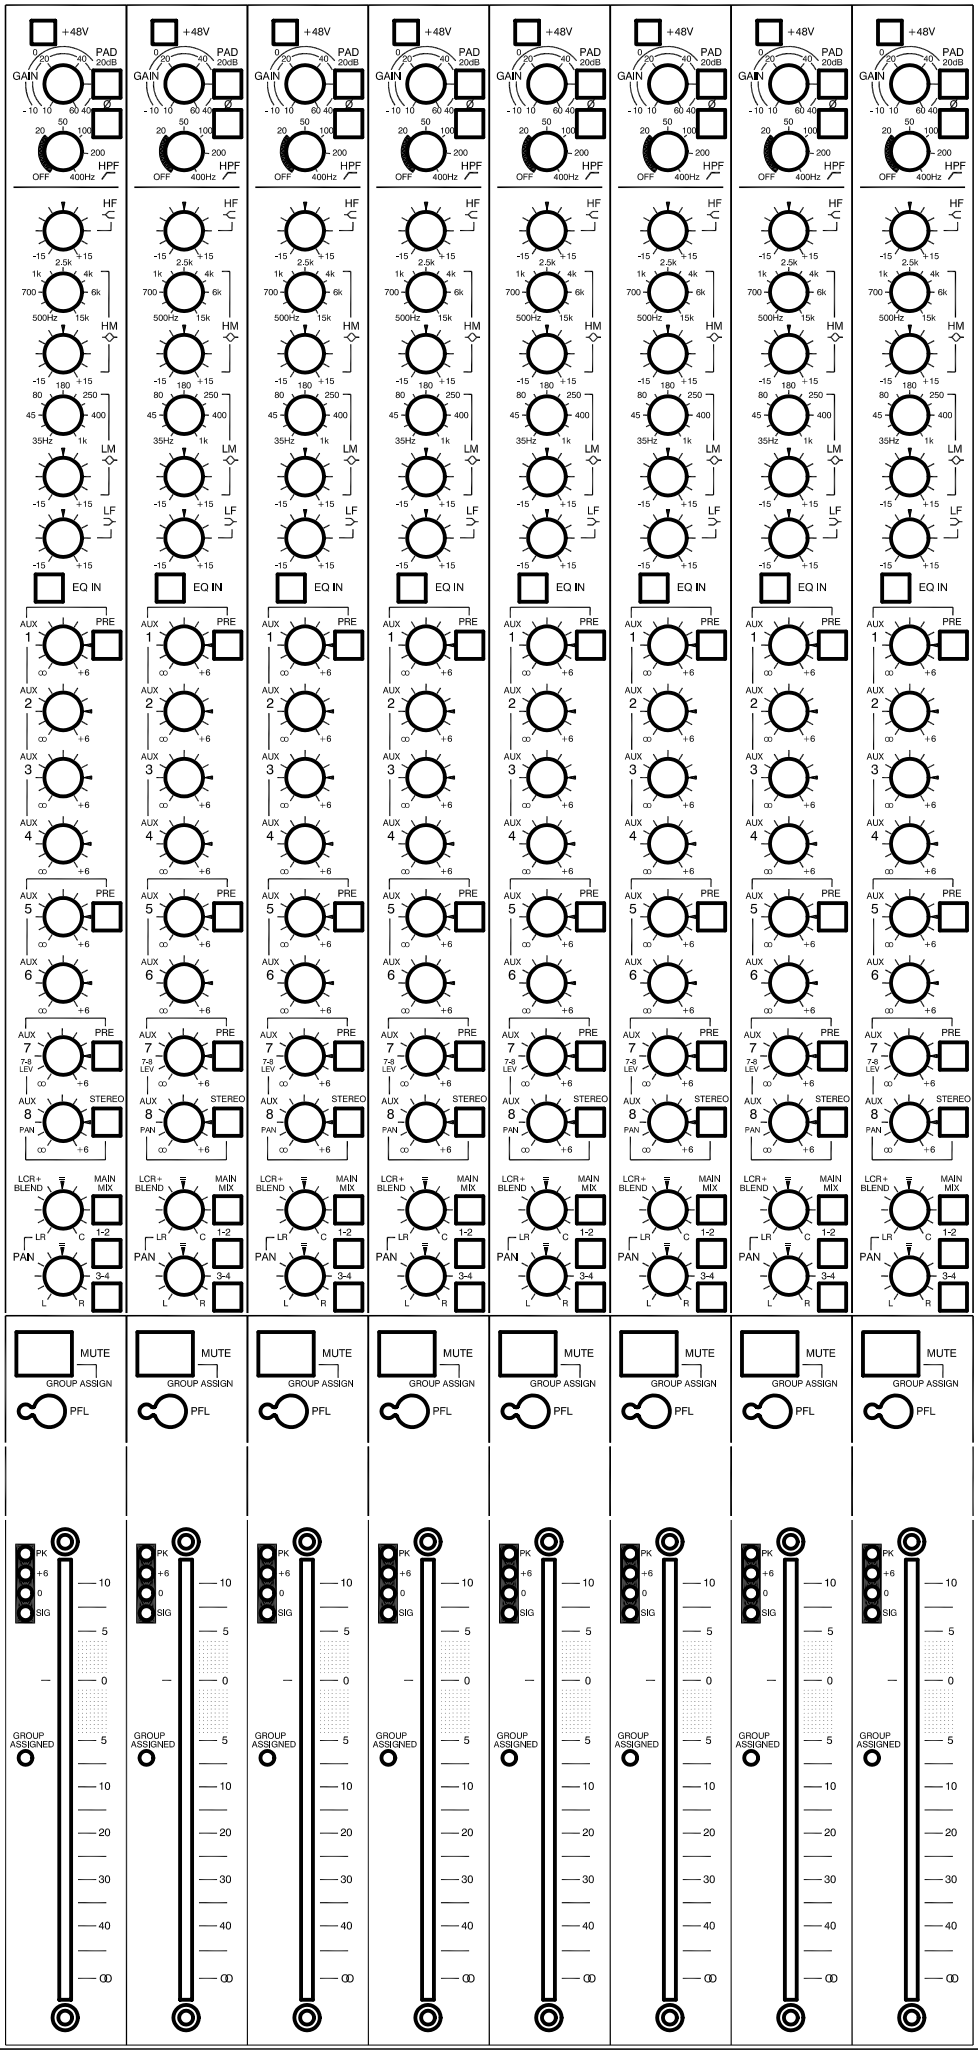
+48V
GAIN
PAD
20dB
Ø
HPF
OFF
400Hz
HF
HM
LM
LF
EQ IN
AUX
PRE
STEREO
LCR+ BLEND
MAIN MIX
PAN
1-2
3-4
MUTE
GROUP ASSIGN
PFL
PK
SIG
GROUP ASSIGNED

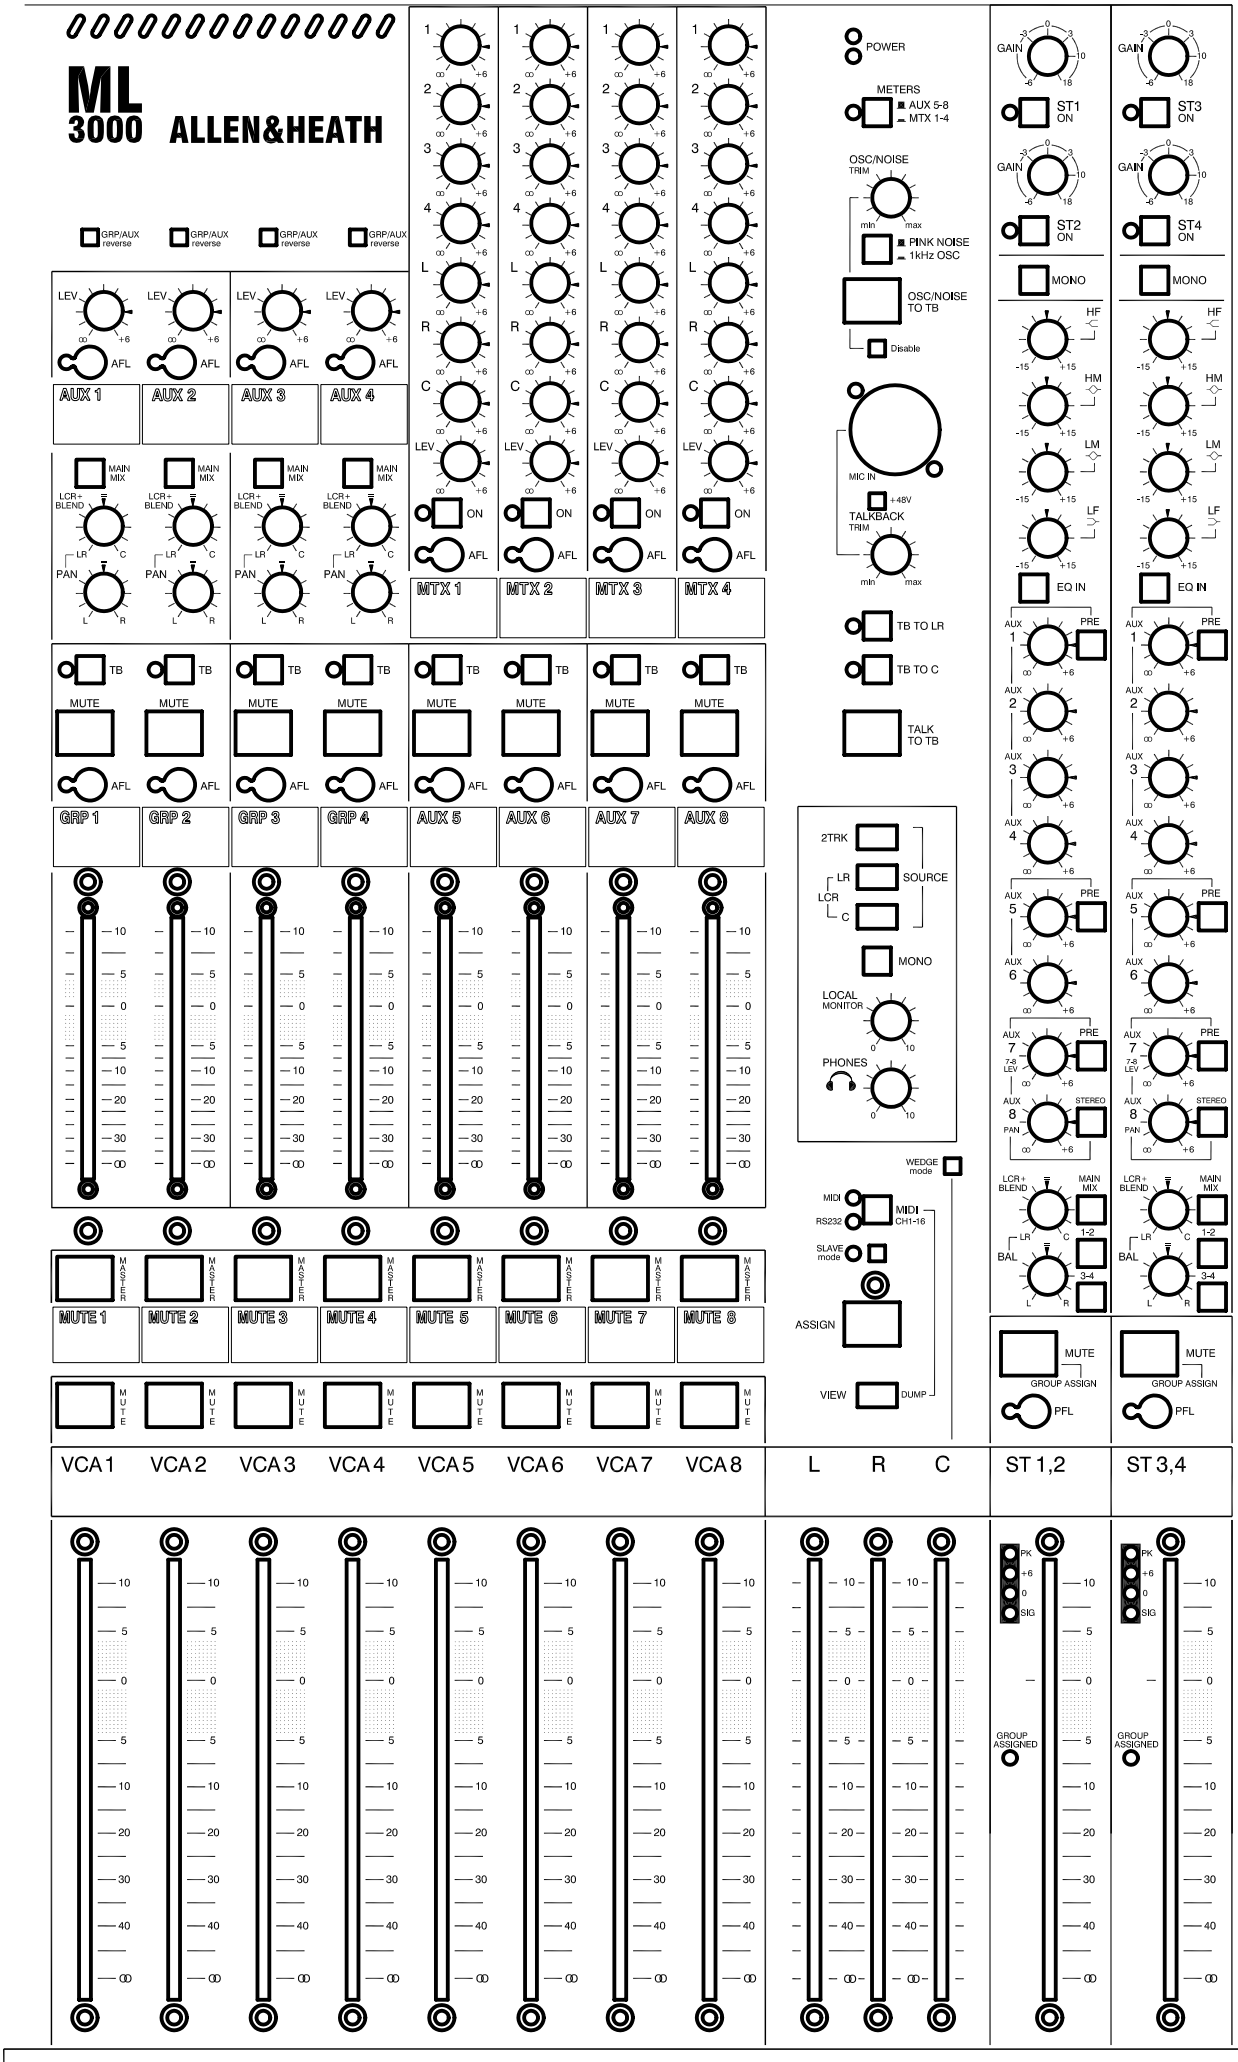
ML
3000
ALLEN&HEATH
GRP/AUX reverse
LEV
AFL
AUX 1
AUX 2
AUX 3
AUX 4
MAIN MIX
LCR+ BLEND
PAN
MTX 1
MTX 2
MTX 3
MTX 4
ON
TB
MUTE
GRP 1
GRP 2
GRP 3
GRP 4
AUX 5
AUX 6
AUX 7
AUX 8
MASTER
MUTE 1
MUTE 2
MUTE 3
MUTE 4
MUTE 5
MUTE 6
MUTE 7
MUTE 8
VCA 1
VCA 2
VCA 3
VCA 4
VCA 5
VCA 6
VCA 7
VCA 8
POWER
METERS
AUX 5-8
MTX 1-4
OSC/NOISE TRIM
PINK NOISE
1kHz OSC
OSC/NOISE TO TB
Disable
MIC IN
+48V
TALKBACK TRIM
TB TO LR
TB TO C
TALK TO TB
2TRK
LR
LCR
C
SOURCE
MONO
LOCAL MONITOR
PHONES
WEDGE mode
MIDI
RS232
MIDI CH1-16
SLAVE mode
ASSIGN
VIEW
DUMP
L
R
C
GAIN
ST1
ST2
ST3
ST4
ON
MONO
HF
HM
LM
LF
EQ IN
PRE
STEREO
BAL
1-2
3-4
MUTE GROUP ASSIGN
PFL
ST 1,2
ST 3,4
PK
SIG
GROUP ASSIGNED